






JIKA

CUBITO-N



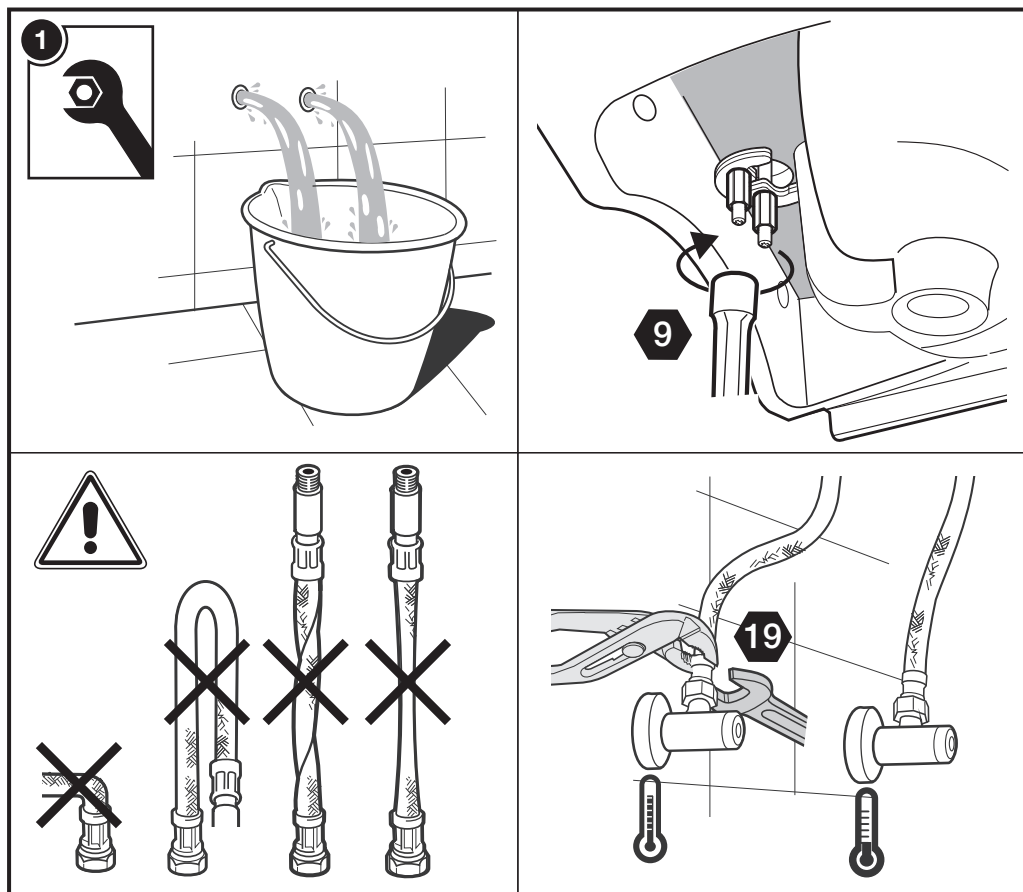

 P 	P bar	 MAX 10	
 P 	P bar	5 MAX MIN 1 	3 2  
  T	°C	 -80 MAX.	 -65 -50 
 Q (1,5 - 5 bar)	l/min	 4-6	 22  7-9



3 — 

3 — 

4

7 —

5

 6

G 3/8"

3 — 

4—

7 — 


8 —

2,5

 6


G 3/8"

— 40









3.111X.8.004.110.1

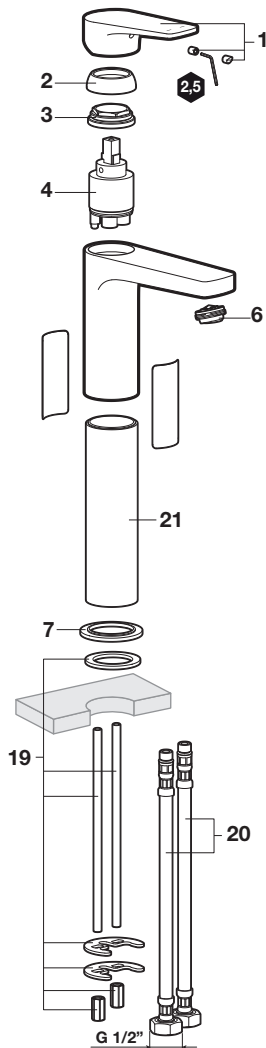


3.411X.1.004.111.1

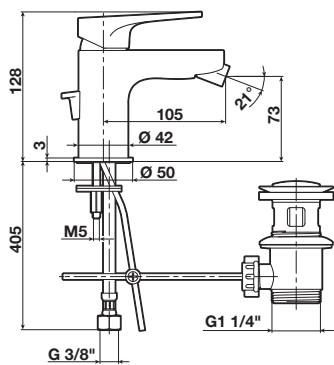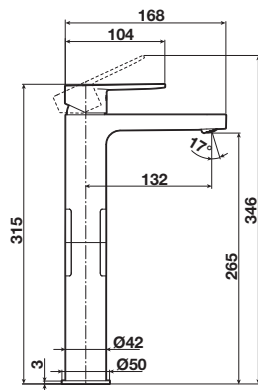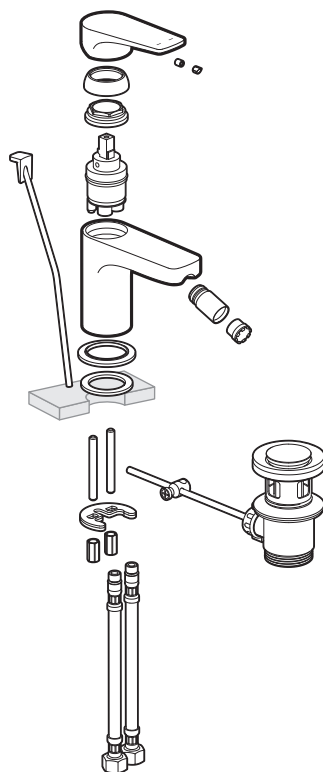

4

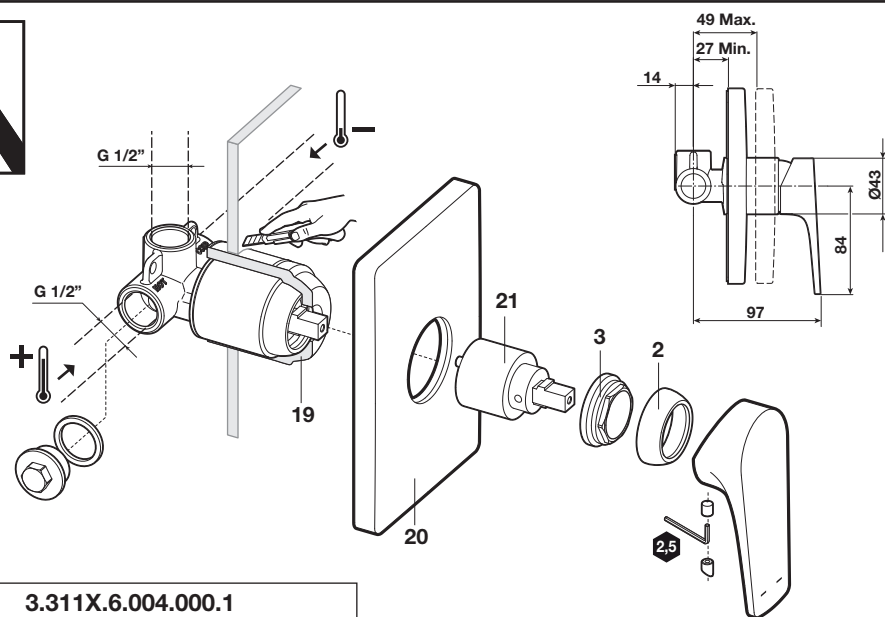


3.311X.6.004.000.1

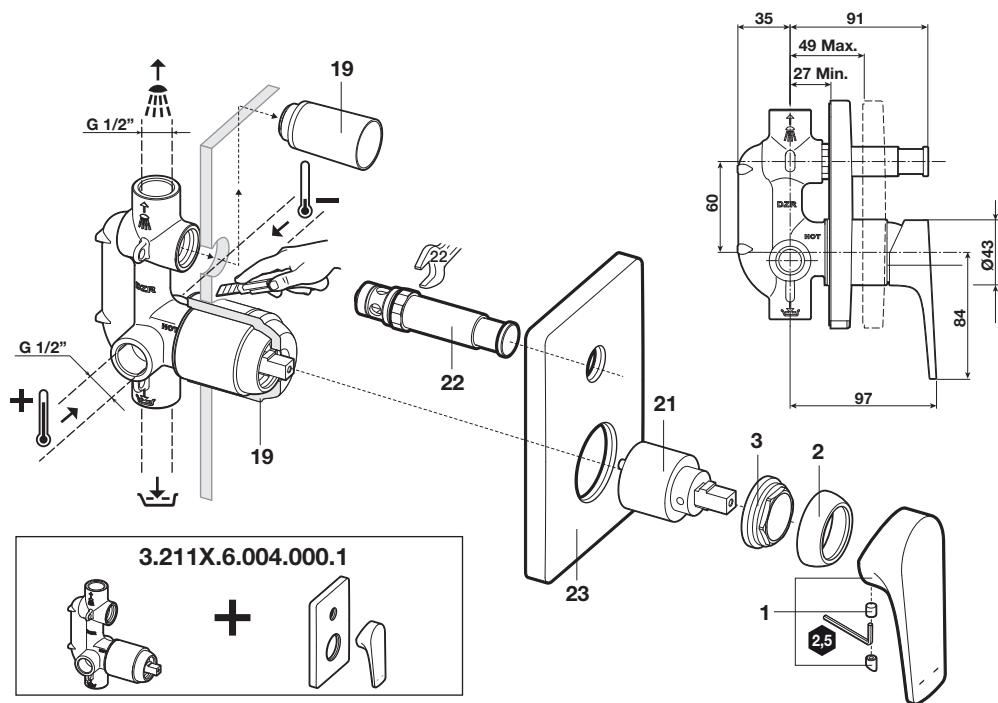






3.211X.6.004.000.1








5



3.311X.7.004.400.1

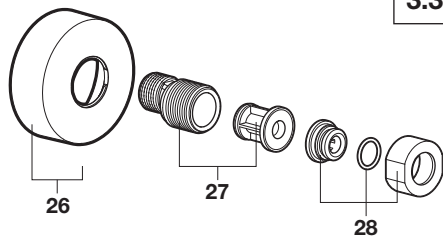


3.211X.7.004.400.1

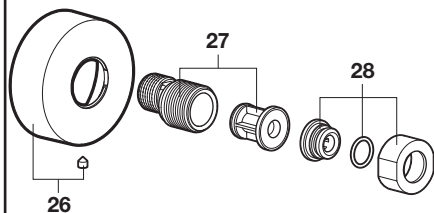

6




3.511X.1.004.260.1



35

36



2,5


38

7

37

3

2




39

9

G 3/8"



Stainless steel



245

200

5°

70



70

320


45°

45°


3

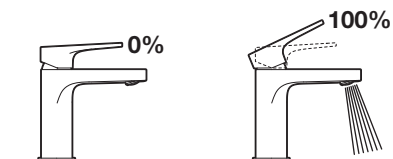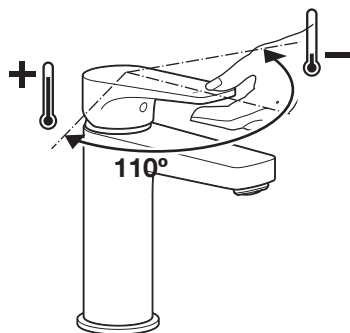


1



2



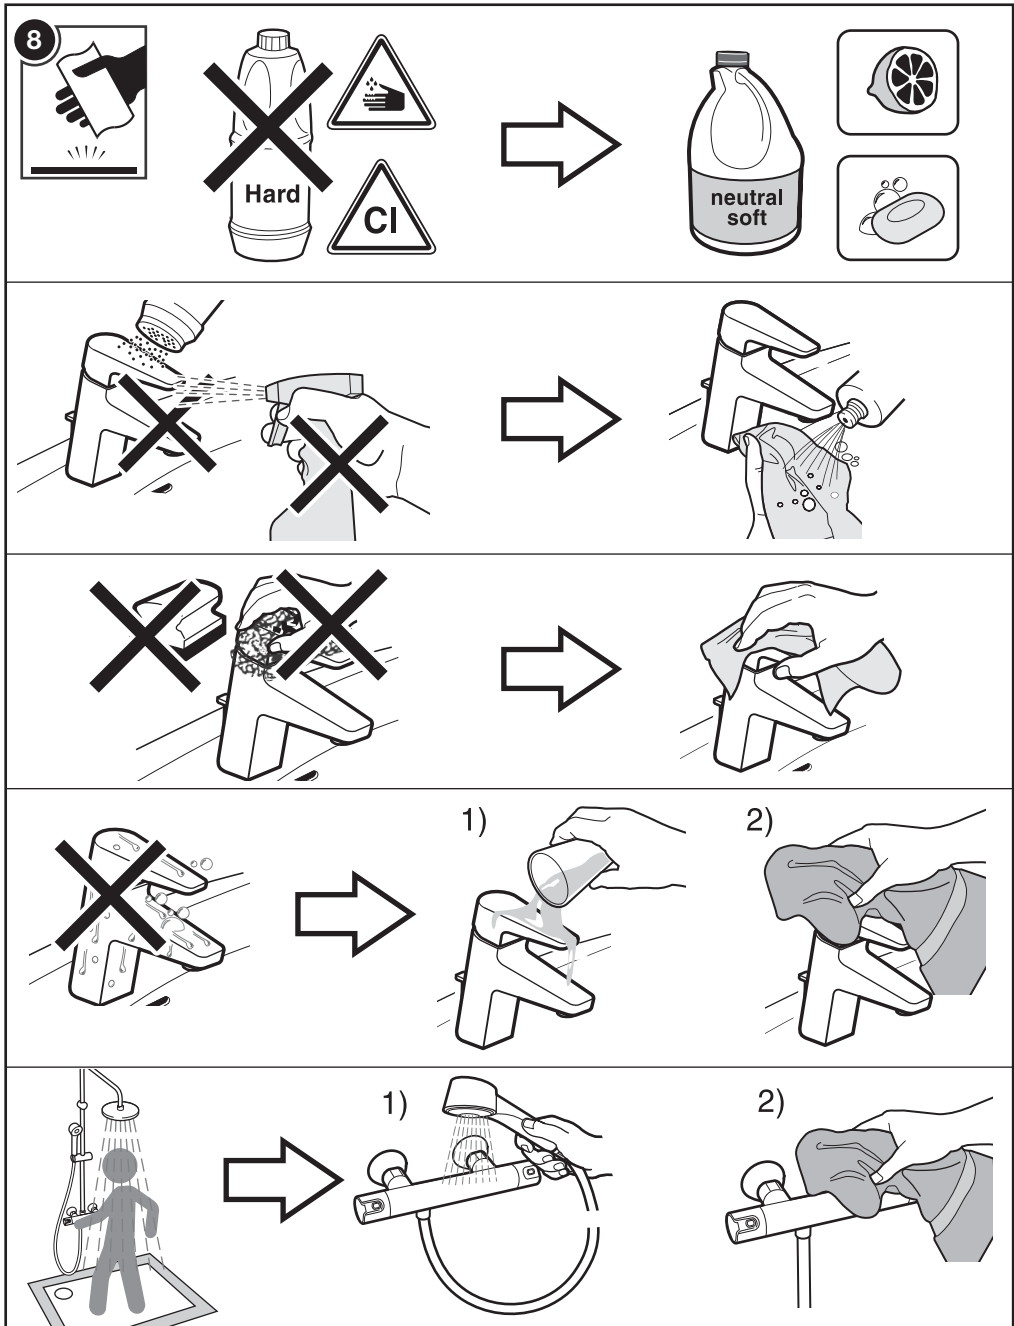

LAUFEN CZ s.r.o.

V Tüních 3/1637

120 00 Praha 2

Česka republika

Fax: +420/296 337 713

e-mail: marketing@cz.laufen.com

www.jika.cz

JIKA